


#UP1008

Miniskirt

This miniskirt features a classic design with a front slit and back zipper closure for easy wear. The tailored silhouette flatters your figure with back darts for contouring. Sew it in a sleek faux leather or suede.

1 cm seam allowance included!

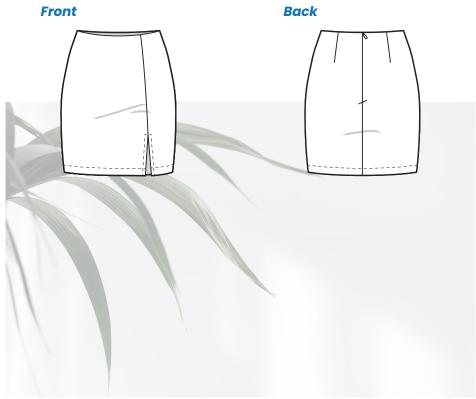

Material

- 75 x 150 cm of faux leather or suede with soft backing
- 20 x 90 cm of light fusible interfacing
- All-purpose thread
- Leather needle
- Teflon foot
- 1x invisible zipper (length 20 cm)
- Invisible zipper foot

Print & Assemble

- First, be sure to use ACROBAT READER to open your PDF sewing patterns. It's free!
- Then, open your file and click on the LAYERS icon (left side of the screen) and uncheck all the sizes you won't need.
- Now, click on the PRINT icon at the top of the screen. The print settings will appear, so verify that the ACTUAL SIZE option is checked. Click on the PRINT button!

- A 5 x 5 cm (and 2 x 2") control square is provided to ensure that your pattern is true to size.
- To ASSEMBLE, cut the sheets at the bottom and right margins, as indicated. Each sheet is labelled with a letter and a number (AI, B2...), so tape them together in numerical and alphabetical order. The sheets on one row should have the same letter, and the ones on the same column should have the same number.

Sizing Guide

	XXS	XS	S	M	L	XL	XXL
Bust	85 cm	89 cm	93 cm	99 cm	105 cm	113 cm	121 cm
Waist	64 cm	68 cm	72 cm	78 cm	84 cm	92 cm	100 cm
Hips	92 cm	96 cm	100 cm	106 cm	112 cm	120 cm	128 cm

This pattern is drafted according to a standard height of 1.64 m.

Garment measurements

Length: 44 cm



#UP1008

Miniskirt

Pattern Pieces

- Back, 2x fabric
- Front, lx fabric
- Side front, 1x fabric
- Frt facing, 1x fabric 1x interfacing
- Bk facing, 2x fabric 2x interfacing

Sewing Assembly

Unless otherwise specified, sew using a **1 cm** wide seam allowance.

- 1. Fuse the facing pieces on medium heat. **Protect the fabric with a pressing cloth between the iron and the interfacing.
- 2. Sew the back darts.
- 3. Sew the centre back seam (bottom to marking). Press open.
- 4. Attach the invisible zipper.
- 5. Sew the front pieces (waist to marking).
- 6. Sew the slit.
- 7. Sew the front and back panels at the side seams.
- 8. Sew the facings at the side seams.
- 9. Attach the facing to the waist. Under stitch the waist seam and fold the facing inside the garment.
- 10. Hem the bottom of the skirt (turn once 3 cm).



Share a photo of you wearing proudly your new miniskirt with

#unfetteredpatterns!



